



VOCHN standing seam clamp WQ-AC-21 is for solar installation on most of round bulb standing seam metal roof. This clamp maintains the elegance of your standing seam roof with no penetrate to the roof material. The simplest and easiest installation way for standing seam roof make it used widely worldwide.

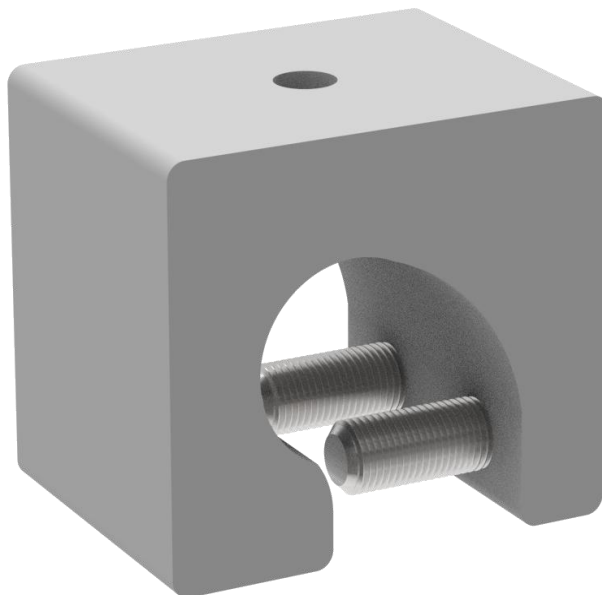


**Standing Seam Clamp**

Item:WQ-AC-21

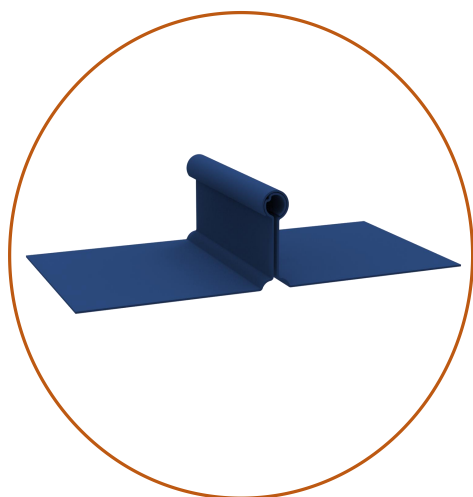


### Roof Type

Suitable for round-bulb seams  $\leq$  23mm

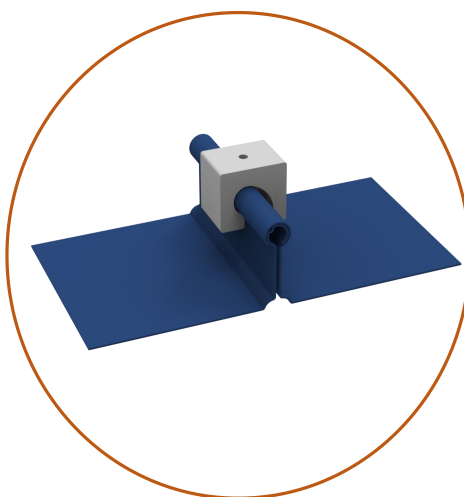

### Roof Friendly

Install on the roof-seam directly , non penetrative

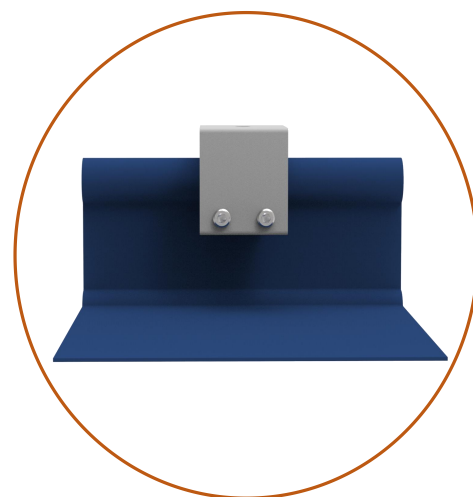


### Easy Installation

Fasten clamp on roof seam with blind rivets in one side

## Technical Data

Max pull out load vertical to roof:	7.8KN
Screw tension:	up to 4NM
Ultimate Tensile Strength:	62
Tensile Yield Strength:	42
Fatigue Strength:	100 Mpa
Shear Modulus:	26.0 Gpa
Shear Strength:	205 Mpa
Hardness, Knoop:	21
Hardness, Vickers:	701
Elongation at Break:	0.80%
Modulus of Elasticity:	69.0 Ga

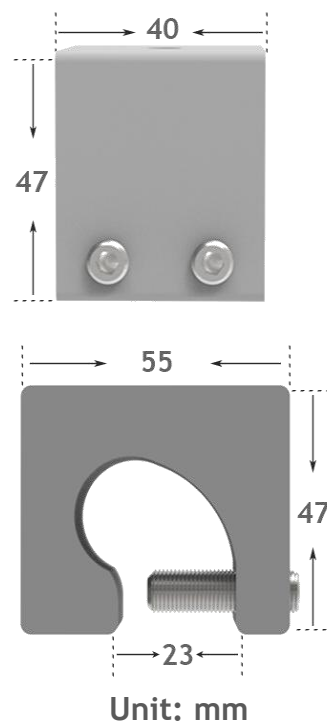


## Quick Installation Guide




**Step 1:**  
Confirm the  
round-bulb seams.

**PS:** Seam width  $\leq$   
23mm

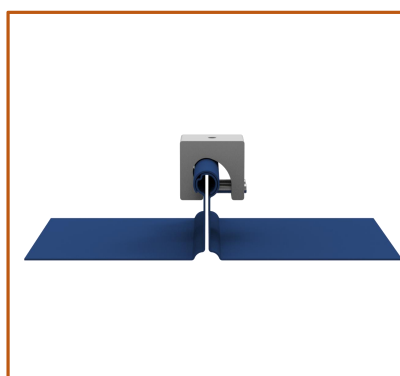


**Step 2:**  
Confirm the Clamp  
position and attach  
the Clamp on roof  
seam.

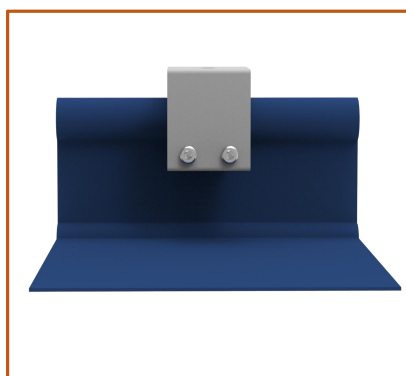

**Step 3:**  
Fasten clamp on  
side with 2 blind  
rivets.

Torque value:  
12 N.m

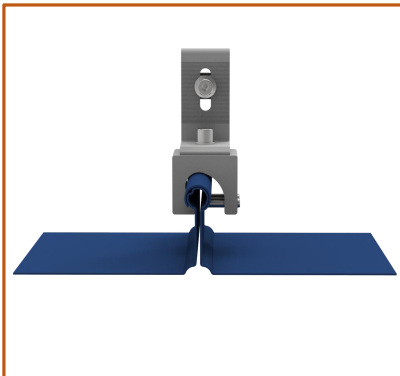

**Step 4:**  
Install L feet on  
clamp and then  
connect rail system.

Torque value:  
12 N.m