



CR Rail System

Click installation way
Easy and fast installation

Quickly


- Automated production line
- Professional package team
- Certified production process

Premium Materials

- Anodized Al6005-T5
- SUS 304 fasteners

Standard or OEM Service

- Standard or Customized Length
- Standard or Customized Rails
- Standard or Customized Rail Kits

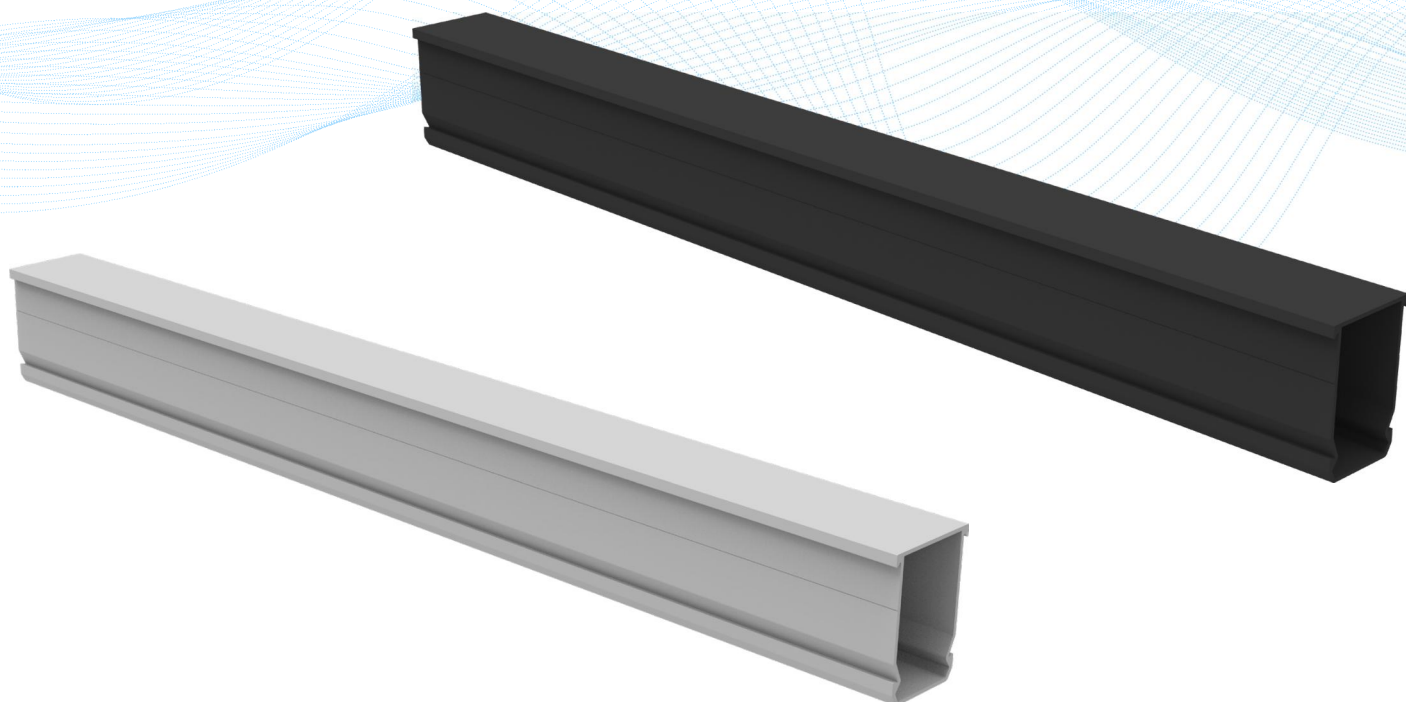


1 Flexible
Available silver and black
Customized length

2 Click Rule
No required tools
Click on roof attachments

3 Stronger
Completely enclosed design
Same material, but stronger
Made by Al6005-T5

Rails

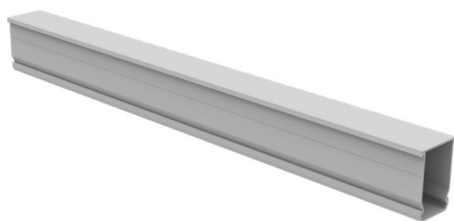


• **WQ-CR2-S**
Silver CR Rail




• **WQ-CR2-B**
Black CR Rail

Drawing

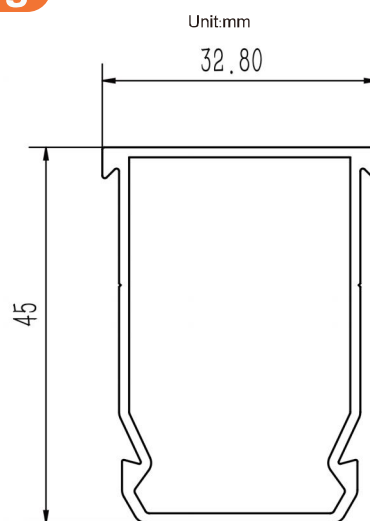

Section area moment	S3=1851.55mm ³ 、S2=1174.93mm ³
Moment of Inertia	I3=73040.08mm ⁴ 、I2=25980.17mm ⁴
Cross section modulus	W3(min)=2634.66mm ³ 、W2(min)=1754.98mm ³

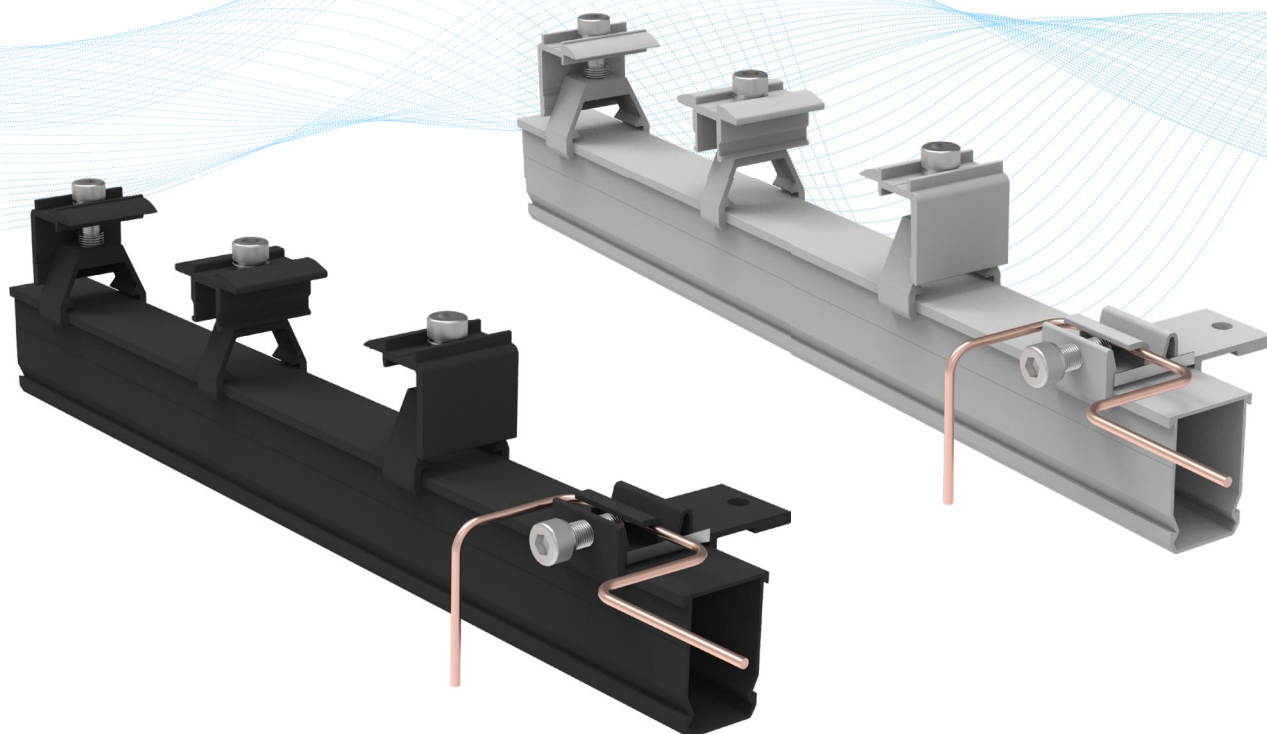

1

Universal

Universal mid/end clamps
for 30-35mm thick modules

2

Easy Fixing

Click the clamps on rail
Clamps are self-standing

3

Strong & Safety

Grounding clip integrated
Non eccentric force problem

CR Kits



• **WQ-CRM-3050-S**
Silver CR Mid Clamp



• **WQ-CRM-3050-B**
Black CR Mid Clamp



• **WQ-CRE-3050-S**
Silver CR End Clamp



• **WQ-CRE-3050-B**
Black CR End Clamp



• **WQ-CR-RSK-S**
Silver CR Rail Splice



• **WQ-CR-RSK-B**
Black CR Rail Splice




• **WQ-CR-GL-S**
Silver CR
Grounding Lug



• **WQ-CR-GL-B**
Black CR
Grounding Lug

Fixing Show



• Grounding Lug Fixing




• Mid Clamp Fixing






• Rail Splice Kit Fixing

Click



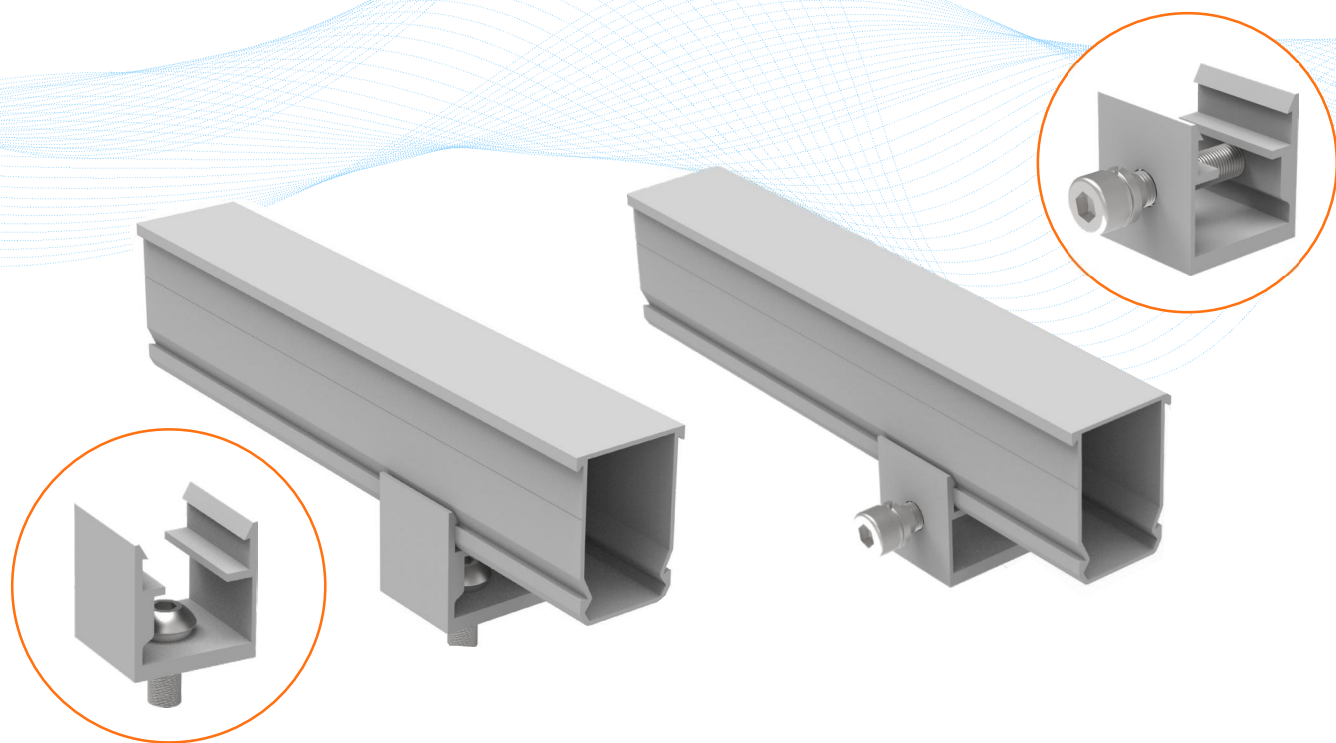


- 1 High matching**
For tile roof hooks adapter choice
For metal roof attachments adapter choice
For CR rails fixing way
- 2 Click Rule**
Click installation way,
save installation time and
reduce labor costs
- 3 Easy**
Easy to achieve portrait
and landscape
Optional top or side fixing

CR Adapters

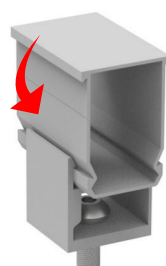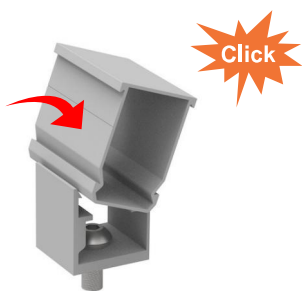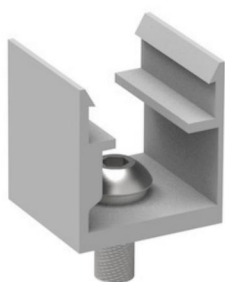

Fix with tile roof hooks

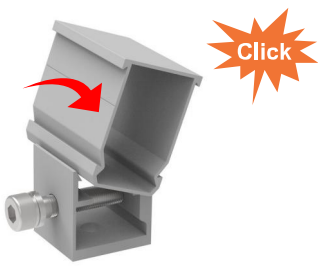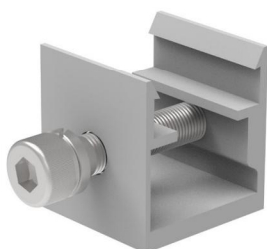

Fix with L feet