

TRB Rail System

Lock from bottom
Easy and fast installation

Quickly


- Automated production line
- Professional package team
- Large stock

Premium materials

- Al6005-T5
- SUS 304 fasteners

Customized

- Customized length
- Three heights for choice

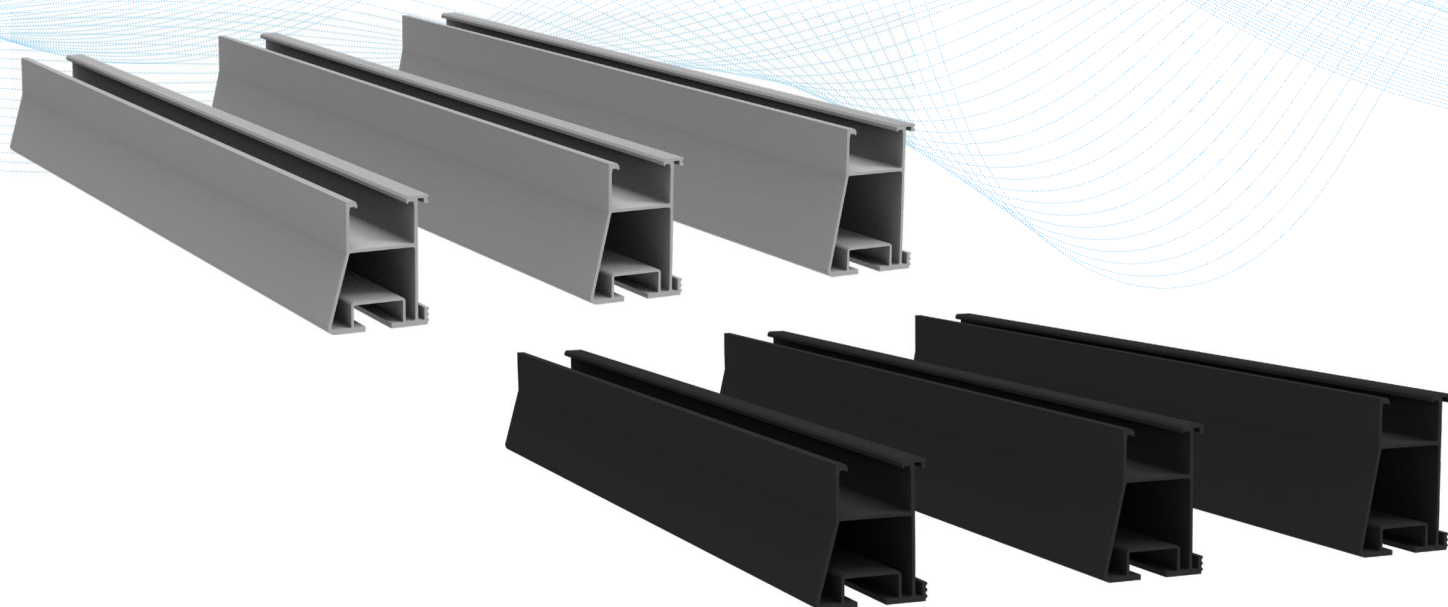

1

3 heights for option

3 heights to meet different snow and wind zones

2

Rugged and durable

Made by Al 6005-T5
Anti-oxidation design
optimal mechanics design

3

Easy

Easy and fast installation
Only need one tool
Fix from bottom of rail

Rails



Length:
4200/4600 mm or customized




- **WQ-TRB45-S**
Sliver TB45 rail
- **WQ-TRB50-S**
Sliver TB50 rail
- **WQ-TRB55-S**
Sliver TB55 rail




Length:
4200/4600 mm or customized

- **WQ-TRB45-B**
Black TB45 rail
- **WQ-TRB50-B**
Black TB50 rail
- **WQ-TRB55-B**
Black TB55 rail

Drawing



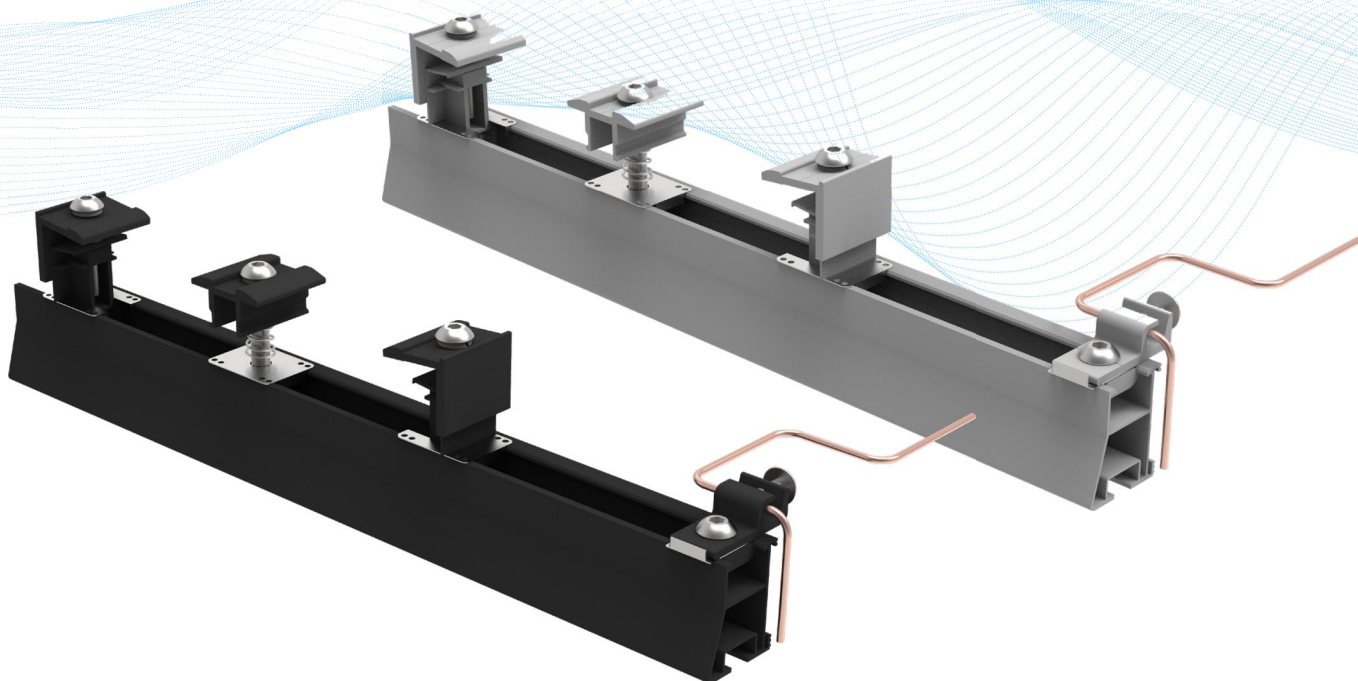

1 Universal
3 heights to meet different snow and wind zones

2 Easy Fixing
Made by Al 6005-T5
Anti-oxidation design
optimal mechanics design

3 Strong & Safety
Grounding clip integrated
Wide rail splice lit used

Fixing Show



• **WQ-TRM-3035-S**
Standard Sliver Mid clamp



• **WQ-TRM-3035-B**
Standard Black Mid clamp



• **WQ-TRE-3035-S**
Standard Sliver End clamp



• **WQ-TRE-3035-B**
Standard Black End clamp



WQ-TRxx-RSK-S
Sliver TR Rail Splice Kits

WQ-TRXX-RSK-B Black
TR Rail Splice kits




WQ-TR-GL-S Sliver
TR Grounding Lug



WQ-TR-GL-B Black
TR Grounding Lug

Fixing Show




Grounding Lug fixing




Mid Clamp fixing



Rail Splice Kit Fixing

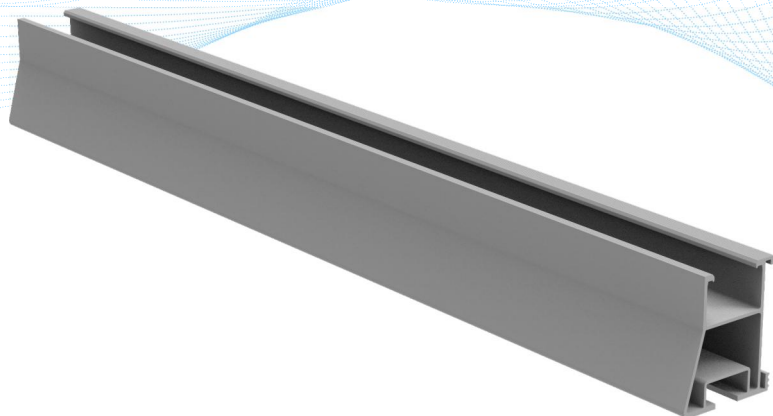

Just insert and fix

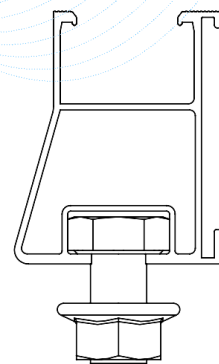


- 1 High maching**
Used with hooks on tile roofs
Used with hanger bolt on tile and metal roofs
Works for most roof attachment


- 2 Stronger**
Optimal mechanics design
Same material, but stronger

- 3 Easy and Fast**
Easy to achieve portrait and landscape
Just tighten the screws at the bottom of the rail

TR Installation

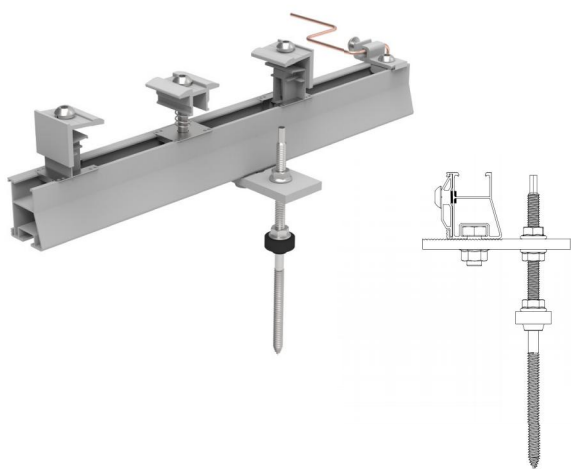

Paired with hanger bolt

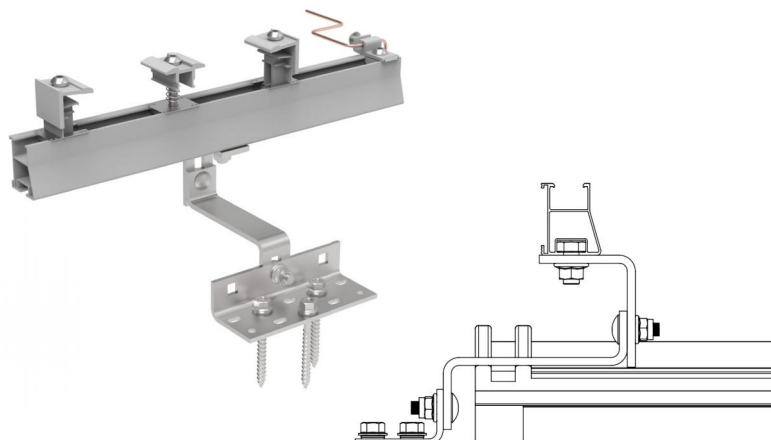

Paired with hook