













## Quickly


- Automated production line
- Professional package team
- Certified production process

#### **Premium Materials**

- Anodized Al6005-T5
- SUS 304 fasteners

#### **Standard or OEM Service**

- Standard or Customized Length
- Standard or Customized Rails
- Standard or Customized Rail Kits

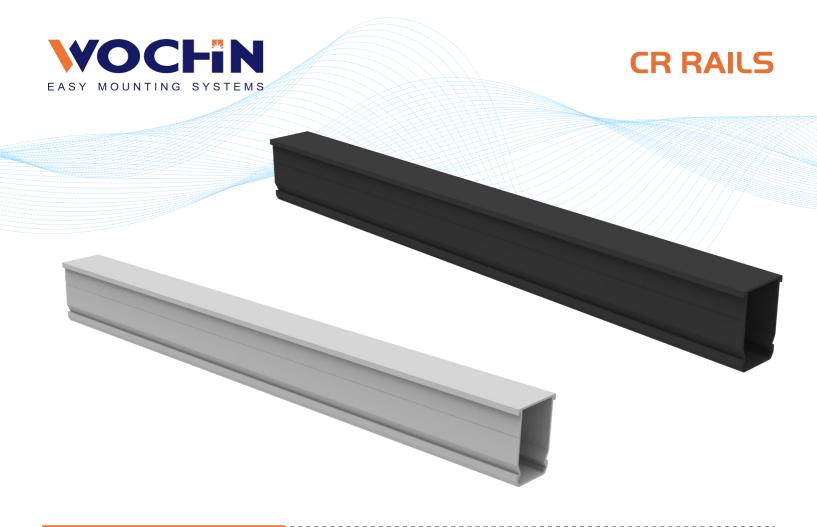



#### Flexible

Available silver and black Customized length



#### **Click Rule**

No required tools
Click on roof attachments



### Stronger

Made by Al 6005-T5 Optimal mechanics design Same material, but stronger

## Rails




• WQ-CR2-S Silver CR Rail




• WQ-CR2-B Black CR Rail

# Drawing



Section area moment	S3=1851.55mm3、S2=1174.93mm3
Moment of Inertia	I3=73040.08mm4、I2=25980.17mm4
Cross section modulus	W3(min)=2634.66mm3、W2(min)=1754.98mm3

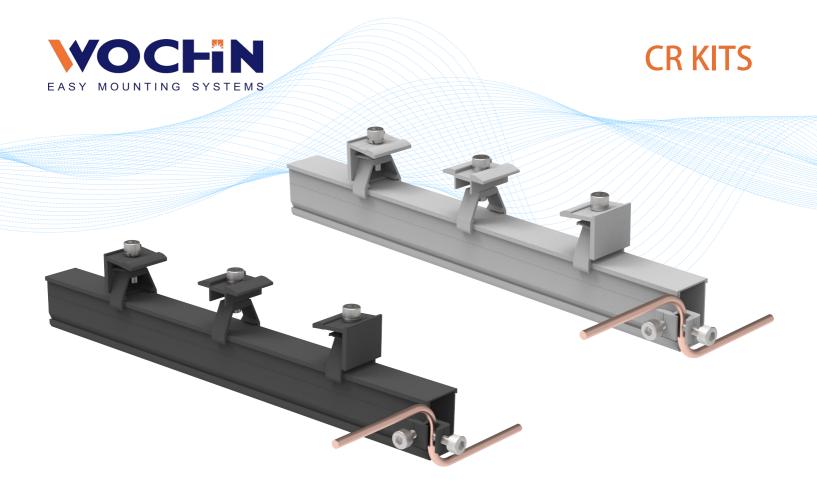



#### Universal

Universal mid/end clamps for 30-35mm thick modules



## **Easy Fixing**

Click the clamps on rail Clamps are self-standing



## Strong & Safety

**Fixing Show** 

Grounding clip integrated Non eccentric force problem

## **CR Kits**



• WQ-CRM-3035-S Silver CR Mid Clamp



• WQ-CRM-3035-B Black CR Mid Clamp



• WQ-CRE-3035-S Silver CR End Clamp



• WQ-CRE-3035-B Black CR End Clamp



Mid Clamp Fixing

Grounding Lug Fixing



Rail Splice Kit Fixing



• WQ-CR-RSK-S Silver CR Rail Splice



• WQ-CR-RSK-B Black CR Rail Splice




• WQ-CR-GL-S Silver CR Grounding Lug



• WQ-CR-GL-B Black CR Grounding Lug



# **CR ADAPTERS**

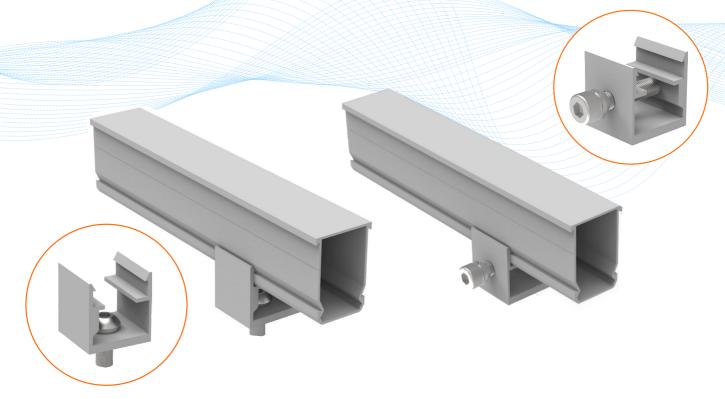



## **High matching**

For tile roof hooks adapter choice For metal roof attachments adapter choice For CR rails fixing way



### **Click Rule**

Click installation way, save installation time and reduce labor costs



#### **Easy**

Easy to achieve portrait and landscape
Optional top or side fixing

# **CR Adapters**











Fix with tile roof hooks











Fix with L feet